

## 6 Safety Simplifier principle layout

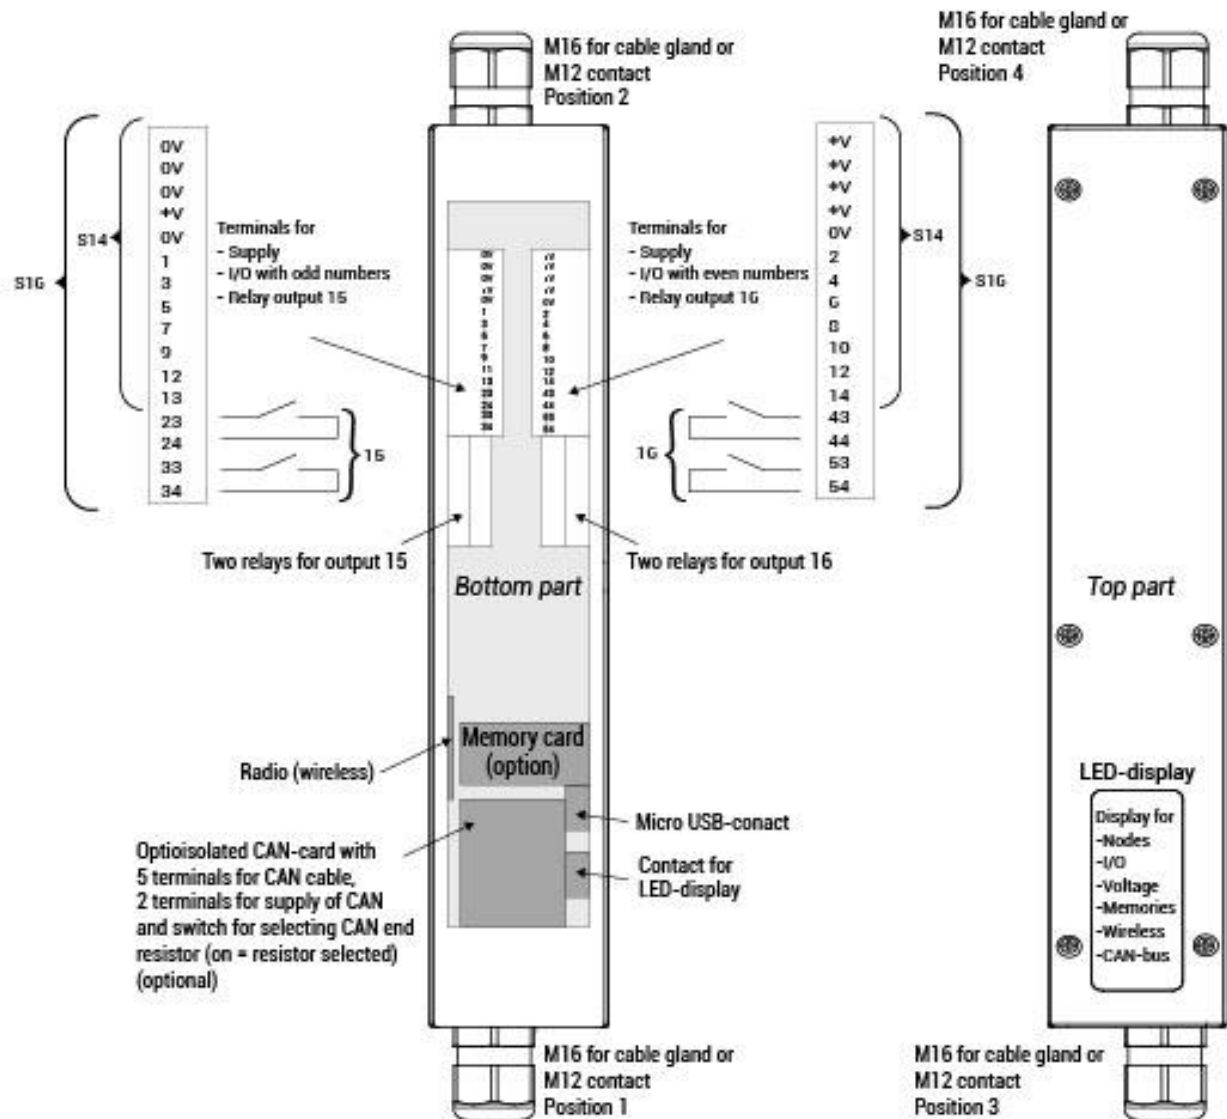


Figure 6-1

The internal and external layout of Safety Simplifier.

### Conductor cross section

- single	0.08...0.5 mm <sup>2</sup>
- fine wire	0.08...0.5 mm <sup>2</sup>
- fine wired (wire sleeve with plastic collar)	0.08...0.5 mm <sup>2</sup>
- fine wired (wire sleeve without plastic collar)	0.25 mm <sup>2</sup>
stripping length	5-6 mm <sup>2</sup>